




Technical Data
Caractéristiques techniques

LTM 1400

Mobile Crane
Grue automotrice

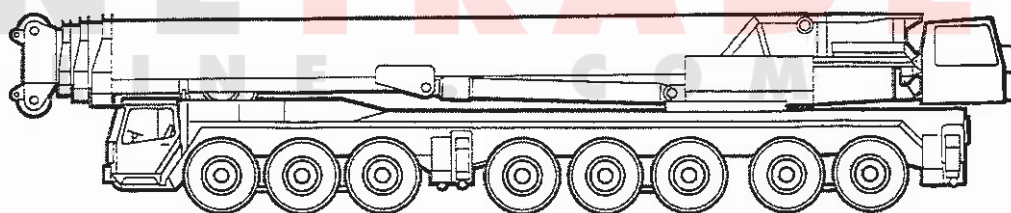

LIEBHERR



Lifting capacities at telescopic boom. Forces de levage à la flèche télescopique.

LTM 1400



52 ft - 164 ft



360°



276000 lbs

85%

 ft	52 ft		70 ft	86 ft	89 ft	104 ft	120 ft		138 ft	154 ft	164 ft	 ft
10	956	839										10
11	867	780										11
12	794	729										12
13	735	685										13
14	702	653										14
15	672	628	601									15
16	642	606	580									16
17	613	582	558		381							17
18	583	557	537		369							18
19	565	535	519		358							19
20	547	515	502	434	348	371						20
22	510	478	468	408	329	350						22
24	475	445	437	384	312	330	290	239	252	219		24
26	443	414	407	362	297	311	275	228	242	210		26
28	415	389	382	343	284	295	262	219	232	202	189	28
30	390	366	359	324	271	279	249	209	223	195	184	30
32	368	345	339	307	258	266	238	200	215	188	177	32
34	349	328	321	292	248	253	228	192	207	182	171	34
36	331	312	305	279	239	242	218	184	200	176	165	36
38	314	295	289	267	229	231	208	177	192	170	158	38
40			274	255	220	220	198	170	185	164	153	40
45			246	230	200	198	178	155	167	150	141	45
50			220	207	184	180	162	143	151	138	128	50
55			196	188	170	164	148	132	137	127	117	55
60				172	159	150	137	122	126	118	108	60
65				158	147	138	127	113	118	110	100	65
70				143	137	128	117	106	109	103	92.5	70
75					128	119	108	98.5	101	95.5	88	75
80						111	101	92.5	95.5	89	80.5	80
85						104	94	87.5	88.5	84	75.5	85
90						97.5	88	82.5	82.5	79	71	90
95							83	78	78	74.5	67	95
100							78	74	73.5	70.5	63	100
105							74	71.5	69.5	66	59.3	105
110							64	67	66.5	62.5	56.1	110
115									63	59.2	53	115
120									59.3	56	50.2	120
125										53.2	47.7	125
130										50.1	45.3	130
135										47.2	43.1	135
140											40.9	140
145											38.8	145
150											36.9	150
I	0		50	92	0	92	92	0	92	92	100	I
II	0		0	0	50	50	92	92	92	92	100	II
% III	0		0	0	50	0	0	92	50	92	100	III

TAB 78044

Remarks referring to load charts.

- The tabulated lifting capacities do not exceed 85 % of the tipping load.
- The crane's structural steelwork is in accordance with DIN 15018, part 3. Design and construction of the crane comply with DIN 15018, part 2, and with F. E. M. regulations.
- The 85 % overturning limit values take into account wind force 5 = wind speed 20 mph.
- Lifting capacities are given in kips.
- The weight of the hook blocks and hooks must be deducted from the lifting capacities.
- Working radii are measured from the slewing centreline.
- The lifting capacities given for the telescopic boom only apply if the folding jib is taken off.
- Lifting capacities are subject to modifications.

Remarques relatives aux tableaux des charges.

- Les forces de levage indiquées ne dépassent 85 % de la charge de basculement.
- La norme DIN 15018, 3ème partie est appliquée pour les charpentes. La construction de la grue est réalisée conformément à la norme DIN 15018, 2ème partie, et aux règles de la F. E. M.
- A 85 % de la charge de basculement, il a été tenu compte d'un vent de force 5 = vitesse de vent 20 mph.
- Les forces de levage sont données en kips.
- Le poids des mouffes et crochets doit être soustrait des charges indiquées.
- Les portées sont calculées à partir de l'axe de rotation.
- Les forces indiquées pour la flèche télescopique s'entendent fléchette dépliée.
- Les forces de levage sont modifiables sans préavis.

Lifting capacities are given in kips (1,000 lbs).



Lifting capacities at guyed telescopic boom. Forces de levage à la flèche télescopique haubanée.

LTM 1400



86 ft - 164 ft



360°



276000 lbs

85%

 ft	86 ft	89 ft	104 ft	120 ft		138 ft	154 ft	164 ft	 ft
20	464	353	386						20
22	446	353	376						22
24	423	348	368	286	218	252	212		24
26	398	341	356	292	216	249	210		26
28	378	332	344	285	215	246	206	186	28
30	359	323	332	278	213	242	202	184	30
32	339	310	317	270	211	239	200	180	32
34	321	298	303	261	207	234	196	177	34
36	305	288	289	252	204	226	192	174	36
38	289	278	276	242	201	219	188	172	38
40	274	268	264	234	197	212	184	169	40
45	244	245	238	215	189	195	172	160	45
50	218	225	217	189	176	181	160	151	50
55	195	207	197	184	164	168	149	142	55
60	175	189	178	169	153	157	140	135	60
65	159	172	161	156	144	145	131	125	65
70	143	158	147	146	134	134	123	118	70
75		140	134	134	125	125	116	111	75
80			123	124	117	117	111	104	80
85			113	115	111	111	103	97.5	85
90			100	105	105	98.5	98	91.5	90
95				96.5	100	92.5	92.5	86	95
100				89	95.5	86	88	81.5	100
105				81.5	91.5	80	84	77	105
110				63.5	75.5	75	78.5	73	110
115						69	75	69.5	115
120							71	66	120
125							67	63.5	125
130							63	60.5	130
135							59.2	58.1	135
140								55.4	140
145								51.9	145
150								43.8	150
I	92	0	92	92	0	92	92	100	I
II	0	50	50	92	92	92	92	100	II
% III	0	50	0	0	92	50	50	100	III

TAB 78051

CRANETRADER

ONLINE . COM



Lifting capacities at telescopic boom. Forces de levage à la flèche télescopique.

LTM 1400



52 ft - 164 ft



360°



209000 lbs

85%

ft	52 ft	70 ft	86 ft	89 ft	104 ft	120 ft	138 ft	154 ft	164 ft	ft
10	956	839								10
11	867	780								11
12	784	729								12
13	735	685								13
14	685	643								14
15	657	604	590							15
16	621	577	565							16
17	592	552	542	381						17
18	568	528	519	389						18
19	545	508	499	358						19
20	523	488	480	434	348	371				20
22	484	453	445	408	329	350				22
24	449	422	413	384	312	330	290	239	252	24
26	418	394	385	362	297	311	275	228	242	26
28	392	369	361	343	284	295	262	219	232	28
30	368	346	339	324	271	279	249	209	223	30
32	346	326	319	305	258	266	238	200	215	32
34	326	307	300	289	248	253	228	192	207	34
36	307	291	283	275	238	242	218	184	200	36
38	288	274	266	261	229	231	208	177	192	38
40			250	248	220	220	198	170	185	40
45			221	219	200	198	178	155	167	45
50			196	192	184	180	162	143	151	50
55			171	169	170	164	148	132	137	55
60				146	159	149	137	122	126	60
65				128	147	134	127	113	118	65
70				115	134	121	117	106	109	70
75					120	108	106	98.5	101	75
80						96.5	96	92.5	95.5	80
85						86.5	87.5	87.5	88.5	85
90						78	79	82.5	82	90
95							72	78	75	95
100							65.5	74	69	100
105							59.7	71.5	64	105
110							54.9	67	58.7	110
115									54.1	115
120									50	120
125										125
130										130
135										135
140										140
145										145
150										150
I	0	50	92	0	92	92	0	92	92	I
II	0	0	0	50	50	92	92	92	92	II
% III	0	0	0	50	0	0	92	50	92	% III

1) over rear / en arrière


TAB 78033



Lifting heights. Hauteurs de levage.

LTM 1400

Telescopic boom.
Flèche télescopique.

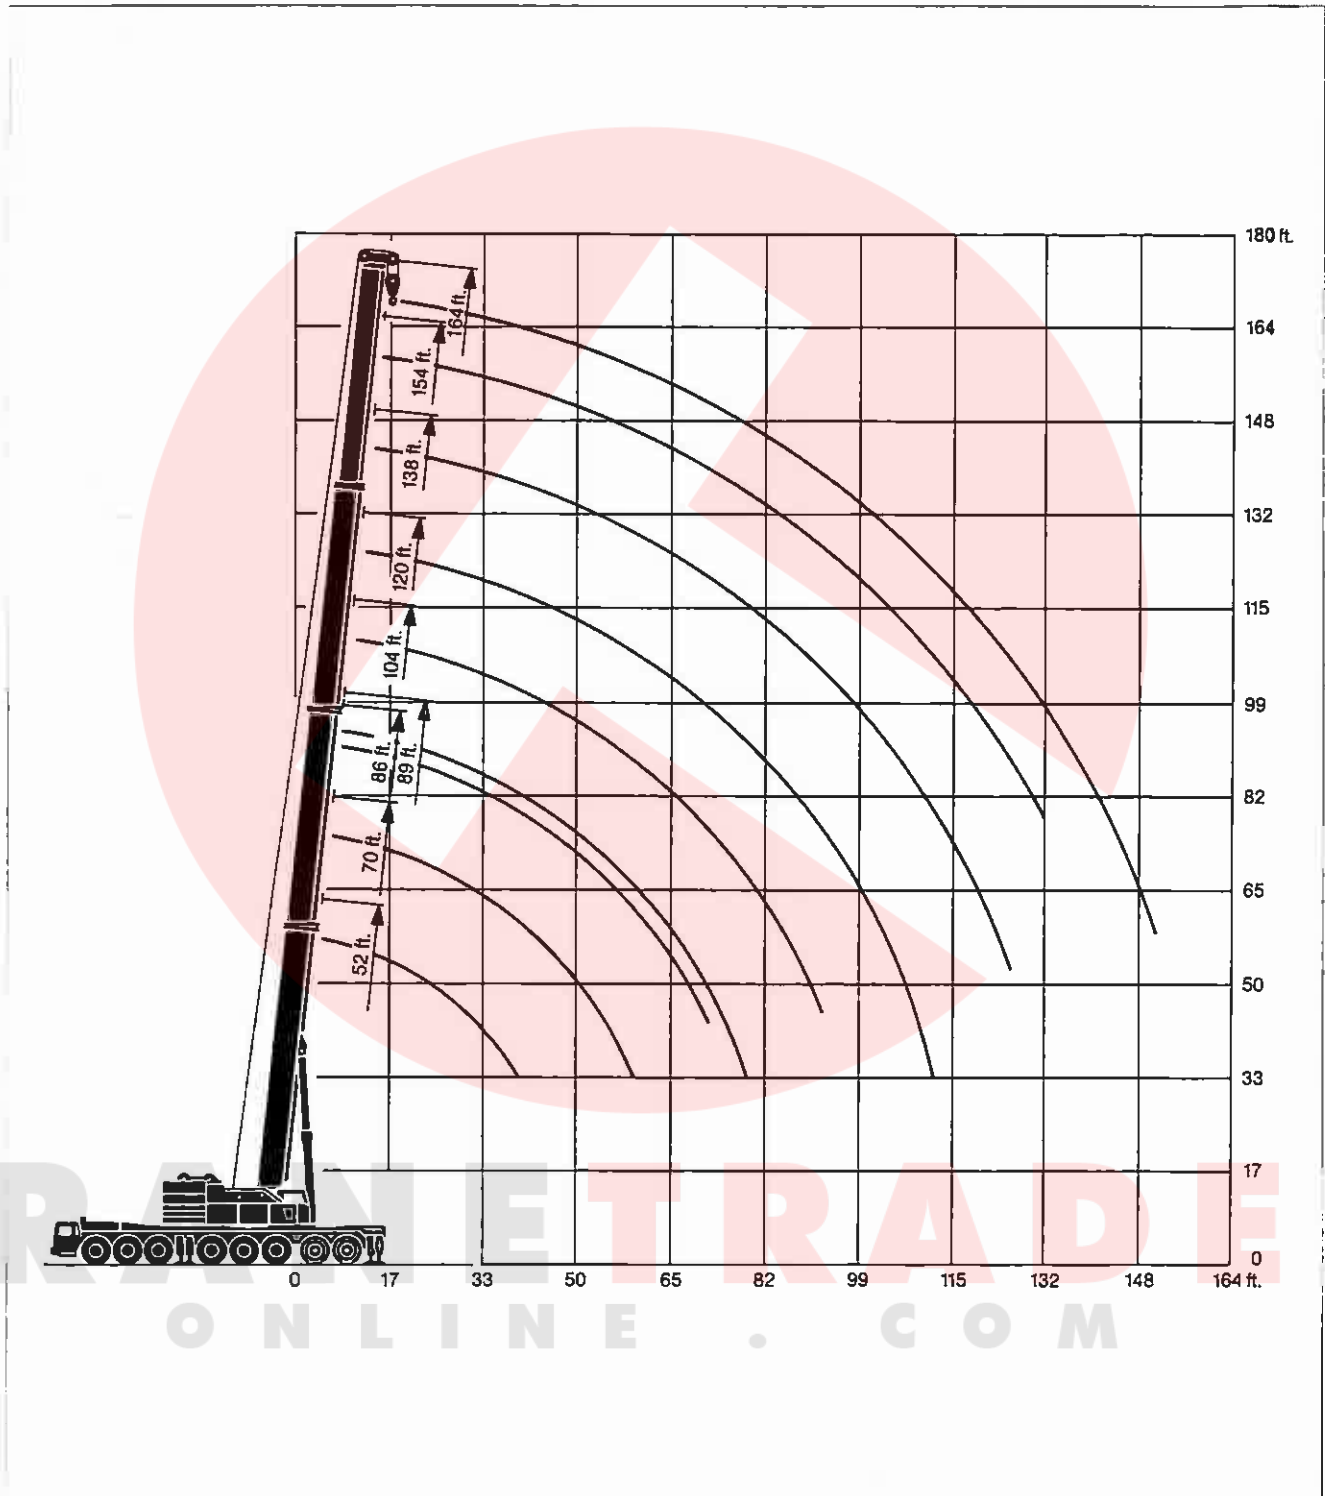



Lifting capacities at the luffing lattice jib. Forces de levage à la fléchette treillis relevable.

LTM 1400



84°

52 ft / 86 ft



69 ft - 276 ft



360°



209000 lbs

85%

	52 ft										86 ft															
	69 ft	92 ft	115 ft	138 ft	161 ft	184 ft	207 ft	230 ft	253 ft	276 ft	69 ft	92 ft	115 ft	138 ft	161 ft	184 ft	207 ft	230 ft	253 ft	276 ft						
34	239																				34					
36	232																				36					
38	226																				38					
40	221	202									202										40					
45	209	195									197										45					
50	202	187	152								181	160									50					
55	185	180	148	121							184	157	127								55					
60	186	172	145	117	93.5						176	154	129	99							60					
65	166	160	142	115	92.5						161	152	144	97							65					
70	147	150	137	113	91	77.5					150	143	129	95.5	73						70					
75		140	131	111	90	76.5	62.5					134	120	94.5	72	57.3					75					
80		130	123	108	89	76	61.5	48.5				125	117	93.5	70	57.3	48.5				80					
85		122	113	106	87	75	61.5	48.5				117	113	91.5	68.5	57.3	48.5				85					
90		113	108	103	83	75	61	48.5	38.1			111	106	90.5	67	57.3	48.5	38.6			90					
95			102	97	80	74.5	60	48	37.6	28.7		104	100	88	65	57.3	48.5	38.1	30		95					
100			95	91	77	73	59.5	47.4	37.1	28.1				84.5	83.5	83.5	58.8	48.5	37.5	29.7	21.7	100				
105			88	86	74	69.5	59.5	47.4	36.6	27.8				88.5	78.5	61.5	55.1	48.5	37.5	29.3	21.2	105				
110			83	81	71	67	57.8	47.4	36.1	27.4				83.5	75	59.2	53.4	46.8	37.5	28.8	20.8	110				
115				77	68	64.5	57.3	46.8	35.6	27.1				79.5	71	57.3	52.3	45.1	36.9	28.4	20.5	115				
120				73	65	62	56.4	46.3	35.1	26.8					67	55.6	51.2	43.8	36.4	28	20.2	120				
125					68	62.5	60.5	53.9	46.3	34.6	26.4				64	53.8	49.6	42.8	36.3	27.5	19.8	125				
130					65	59.3	57.1	52.2	46.3	34.1	26.1				61.5	52.2	48.7	42.1	35.5	27.2	19.7	130				
135						56.5	54.6	50.5	45.7	33.5	25.8					50.2	47.2	41.3	34.6	26.8	19.4	135				
140						54	52.5	48.9	44.8	32.9	25.6					48.1	45.6	40.4	33.8	26.4	19	140				
150						49	47.9	45.5	42.7	31.7	25					44.9	42.7	38.7	32.6	25.6	18.6	150				
160							43.5	42.4	40.4	30.6	24.3						40.4	37.1	31.8	25	18.2	160				
170							40.9	39.8	38.7	29.6	23.6						38.7	35.4	30.9	24.3	17.9	170				
180								38.1	37	28.4	23						36.2	32.9	29.3	23.6	17.5	180				
190								35.9	34.8	27.4	22.3							31.4	28.1	23.1	17.2	190				
200									32.5	26.4	21.6								27.3	22.5	16.8	200				
210									30.9	25.4	20.7									26.5	21.8	16.3	210			
220									29.2	24.5	20.1										25.6	21	16	220		
230										23.4	19.3											20.4	15.6	230		
240											18.5											19.9	15.3	240		
250											17.8													15	250	
260											17.1														14.6	260

Lengths of telescopic boom including 10 ft luffing lattice jib adapter.

Longueurs de la flèche télescopique avec 10 ft rallongé pour fléchette relevable.

TAB 78118.1

Les forces de levage sont données
en kips (1,000 lbs).



Lifting capacities at the lattice fly jib. Forces de levage à la flèche treillis fixe.

LTM 1400



138 ft* - 164 ft**



0°

39 ft - 200 ft



360°



209000lbs

85%

ft	138 ft*	154 ft*	154 ft**								164 ft**	ft
	39 ft	39 ft	39 ft	62 ft	85 ft	108 ft	131 ft	154 ft	177 ft	200 ft	200 ft	
34	109	101										34
36	106	99.5										36
38	103	98										38
40	101	96.5	87.5									40
45	96.5	93	83.5									45
50	92	89	79.5	63.5								50
55	87	85.5	75.5	60.5	47.4							55
60	83	82	72	58	45.3	35.8	28.9					60
65	79	77.5	68	55.4	43.4	34.2	27.5					65
70	75.5	74	64.5	52.9	41.6	32.6	26.5	21.4				70
75	72.5	71.5	61.5	50.5	39.9	31.1	25.3	20.3	15.3	11		75
80	69.5	68.5	58.8	48.2	38.4	29.7	24	19.2	14.4	10.2	9.8	80
85	66.5	65.5	56	46.2	36.9	28.5	23.8	18.4	13.7	9.7	9.3	85
90	64	62.5	53.6	44.2	35.4	27.3	21.9	17.4	12.9	9.2	8.8	90
95	62	59.6	51.3	42.3	34	26.3	21	16.6	12.1	8.6	8.3	95
100	59.9	56.8	49.1	40.5	32.6	25.2	20.1	15.8	11.5	8.1	7.8	100
105	57.5	53.8	47	38.8	31.1	24	19.4	15	11	7.7	7.5	105
110	55	51.3	45.1	37.1	29.9	23	18.6	14.3	10.4	7.4	7.2	110
115	52.5	48.6	43.3	35.6	28.9	22.2	17.7	13.5	9.8	7	6.8	115
120	49.9	46.1	41.3	34.2	27.8	21.6	16.9	12.8	9.4	6.7	6.5	120
125	47.2	43.7	39.1	33	26.6	20.9	16.3	12.3	9	6.4	6.1	125
130	44.4	41.7	37.3	31.6	25.8	20.1	15.6	11.8	8.7	6	5.6	130
135	41.5	39.7	35.6	30.4	24.9	19.3	15.1	11.4	8.2	5.7	5.3	135
140	39.8	37.8	33.9	29.4	24.1	18.7	14.6	11	7.8	5.4	5	140
145	36.3	35.9	32.3	28.5	23.3	18.2	14	10.3	7.5	5.1	4.8	145
150	33.9	33.5	31.1	27.5	22.4	17.4	13.5	10	7.1	4.9	4.7	150
155	31.8	31.4	29.6	26.7	21.7	16.8	12.9	9.7	6.9	4.7	4.5	155
160	29.3	29.5	28.3	25.6	21	16.3	12.4	9.3	6.7			160
165	27.2	27.6	27	24.3	20.2	15.7	12.1	9	6.4			165
170	25.4	25.6	25.3	23.3	19.5	15.1	11.7	8.6	6.2			170
175		23.9	23.8	22.2	18.9	14.6	11.3	8.3	5.9			175
180		22.2	22.3	21.1	18.3	14	10.9	8	5.5			180
190			19.4	17.2	17.2	13	10.3	7.4	5.1			190
200				17.2	16.1	12.1	9.8	6.9	4.7			200
210				15	14.8	11.5	9.3	6.4	4.4			210
220				12.8	13.3	10.6	8.9	5.9	4.1			220
230					11.6	9.9	8.1	5.5	3.6			230
240					10	9.1	7.5	5.2				240
250						8.1	7	4.8				250
260						6.7	6.5	4.5				260
270							5.9	4.2				270

* with 5 ft boom extension / avec 5 ft extension de flèche
 ** with 29 ft boom extension / avec 29 ft extension de flèche

TAB 78034



LTM 1400



84°

120 ft / 154 ft



69 ft - 276 ft



360°



209000 lbs

85%

ft	120 ft										154 ft										ft
	69 ft	82 ft	115 ft	138 ft	161 ft	184 ft	207 ft	230 ft	253 ft	276 ft	69 ft	92 ft	115 ft	138 ft	161 ft	184 ft	207 ft	230 ft	253 ft	276 ft	
50	124										77										50
55	123	103									75	65									55
60	120	101	84.5								75	65									60
65	116	99.5	82								74	63.5	52.9								65
70	114	98.5	81	66.5							75	64.5	52.9								70
75	113	97.5	80	65.5	52.9						74	63.5	52.4	40.8							75
80		96.5	79	65	52.7	41.9					73	63	51.8	40.8	32.6						80
85		94	78.5	64	51.9	41.9					73	63	51.8	40.8	32.6						85
90		92	77.5	63	51.8	41.9	33.1				63	51	40	31.8	23.9						90
95		90.5	76	63	51.3	41.4	33.1	26.5			62.5	50.7	39.7	31.5	23.7	19.3					95
100		88.5	74.5	62.5	50.7	40.8	33.1	26.5	20.5		61.5	50.7	39.7	31.5	23.6	19.2	14.6				100
105			73	60.5	50.7	40.8	33.1	26.5	20.3	14.6	60.5	50.7	39.7	31.5	23.6	19.2	14.6				105
110			70	58.9	49.9	40.8	32.2	26.5	20.1	14.2	60.5	49.9	38.8	31.5	23.4	19	14.4				110
115			68.5	57.8	49	40.2	32	26.5	20	14		49.6	38.6	31.5	23.4	19	14.2	9.7			115
120			66.5	56.7	47.6	39.4	32	26.5	19.8	13.9		49.3	38.6	31.1	23.3	18.8	14.1	9.6			120
125				55	46.1	38.5	32	26.5	19.8	13.9		48.5	38.6	30.2	23.1	18.5	13.9	9.5			125
130					53.3	44.3	37.7	32	26.5	19.7	13.7		48.5	38.6	30.2	23	18.5	13.9	9.5		130
135					52.3	43.5	37.2	31.8	26.5	19.6	13.6			38.3	30.2	22.9	18.5	13.8	9.5		135
140					51.4	42.6	36.7	31.7	26.5	19.5	13.5			37.8	30.2	22.8	18.4	13.6	9.5		140
150						40.9	35.4	31	26	19.2	13.4			37.5	29.7	22.6	18.2	13.4	9.3		150
160							33.8	30	25.4	18.9	13.2				29.1	22.4	18	13.2	9		160
170							32.1	29.2	25.4	18.5	13				29.1	22.3	17.9	13	9		170
180							31.2	28.2	25.4	18.4	12.8					22.1	17.7	12.9	8.9	4.9	180
190								27.3	25.4	18.2	12.8					21.9	17.5	12.8	8.8	4.9	190
200								26.4	25.1	18	12.7						17.4	12.7	8.8	4.9	200
210									24.3	17.9	12.6						17.2	12.6	8.8	4.9	210
220										17.4	12.5						17	12.4	8.7	4.9	220
230											17.1	12.4						12.2	8.6	4.9	230
240												12.3							8.6	4.9	240
250													12.2						8.6	4.9	250
260														12.2					8.4	4.9	260
270																				4.9	270

Lengths of telescopic boom including 10 ft luffing lattice jib adapter.


Longueurs de la flèche télescopique avec 10 ft raccord pour fléchette relevable.

TAB 78118.2



Hauteurs de levage.

Luffing lattice jib.
Flèche treillis relevable.

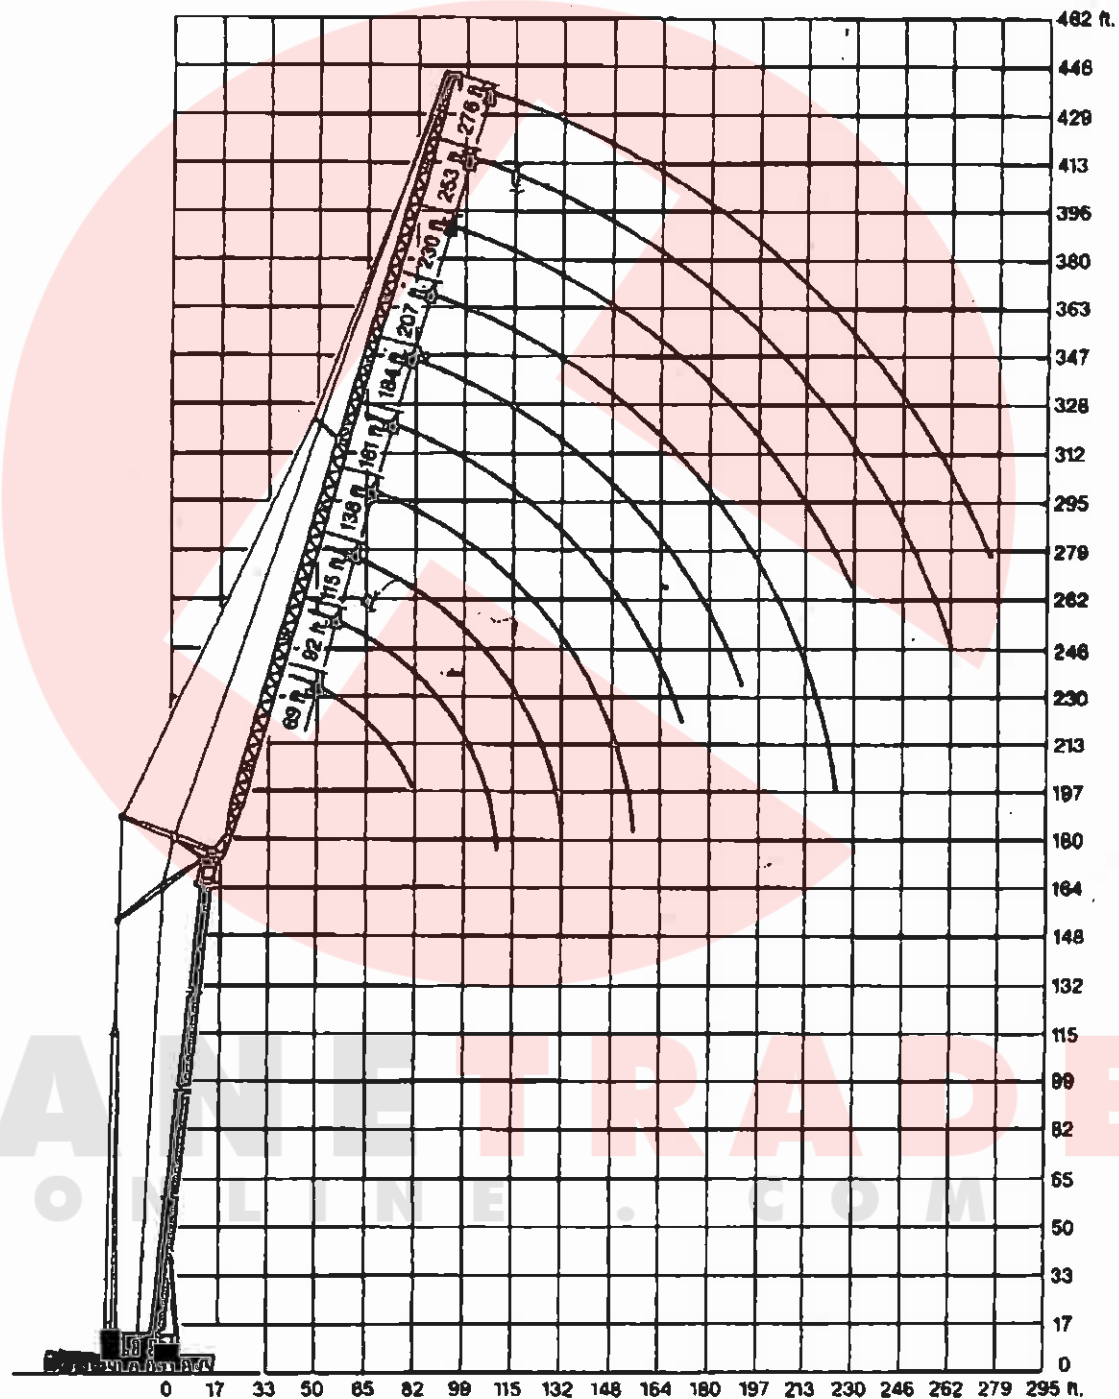



LTM1400

138 ft**
- 164 ft**20°
39 ft - 154 ft

360°



209000 lbs

85%

 ft	138 ft**		154 ft**						164 ft**		 ft
	39 ft	39 ft	62 ft	85 ft	108 ft	131 ft	154 ft	154 ft			
55	62									55	
60	60.5	57.9								60	
65	58.4	56.2								65	
70	56.7	54.5	40.1							70	
75	55.1	52.8	38.9							75	
80	53.3	51.3	37.6	27.8						80	
85	51.5	49.9	36.7	27						85	
90	49.6	48.3	35.8	26.3						90	
95	47.8	46.5	34.9	25.5	19					95	
100	46	44.7	33.9	24.7	18.3					100	
105	44.5	43	32.9	24	17.6	12.1				105	
110	43.2	41.3	31.7	23.5	17.1	12				110	
115	41.8	39.9	30.6	22.9	16.6	11.7				115	
120	40.5	38.5	29.7	22.3	16.1	11.3	8.5			120	
125	39.2	37.2	28.8	21.8	15.4	11	8.1	7.7		125	
130	38	36	28.2	21.3	14.9	10.5	7.8	7.5		130	
135	36.8	34.8	27.2	20.7	14.5	10.1	7.6	5.4		135	
140	35.6	33.7	26.4	20.1	14.3	9.8	7.4	5.2		140	
145	34.5	32.7	25.7	19.8	14.3	9.5	7.3	7		145	
150	33.5	31.3	24.9	19.3	14	9.3	7.1	6.7		150	
155	32.3	29.9	24.1	18.8	13.6	9.1	6.8	6.5		155	
160	30.8	28.4	23.4	18.3	13.2	8.9	6.5	6.3		160	
165	29	27.1	22.6	17.8	12.7	8.5	6.4	6.1		165	
170	27.1	25.9	22.1	17.3	12.4	8.2	6.2	5.8		170	
175	25.3	24.7	21.6	16.8	12.2	8	6	5.6		175	
180	23.4	23.4	21.1	16.4	12	7.8	5.7	5.4		180	
190		20.6	19.8	15.6	11.6	7.5	5.3	5.1		190	
200		17.6	18.2	14.8	11.1	7.2	5	4.7		200	
210			16.3	14.1	10.6	6.8	4.6	4.4		210	
220			14	13.3	10.3	6.7	4.3	4.1		220	
230				12.4	9.8	6.5	4.1	3.9		230	
240				11.2	9.3	6.3	3.9	3.6		240	
250					8.8	5.9	3.7	3.3		250	
260					8.3	5.6	3.4	3.1		260	
270					7.9	5.4	3.2			270	
280					7.1	5.2				280	

** with 29 ft boom extension / avec 29 ft extension de flèche.

TAB 78035

CRANETRADER

ONLINE . COM




Lifting heights. Hauteurs de levage.

LTM 1400

Lattice fly jib.


Fléchette treillis fixe.

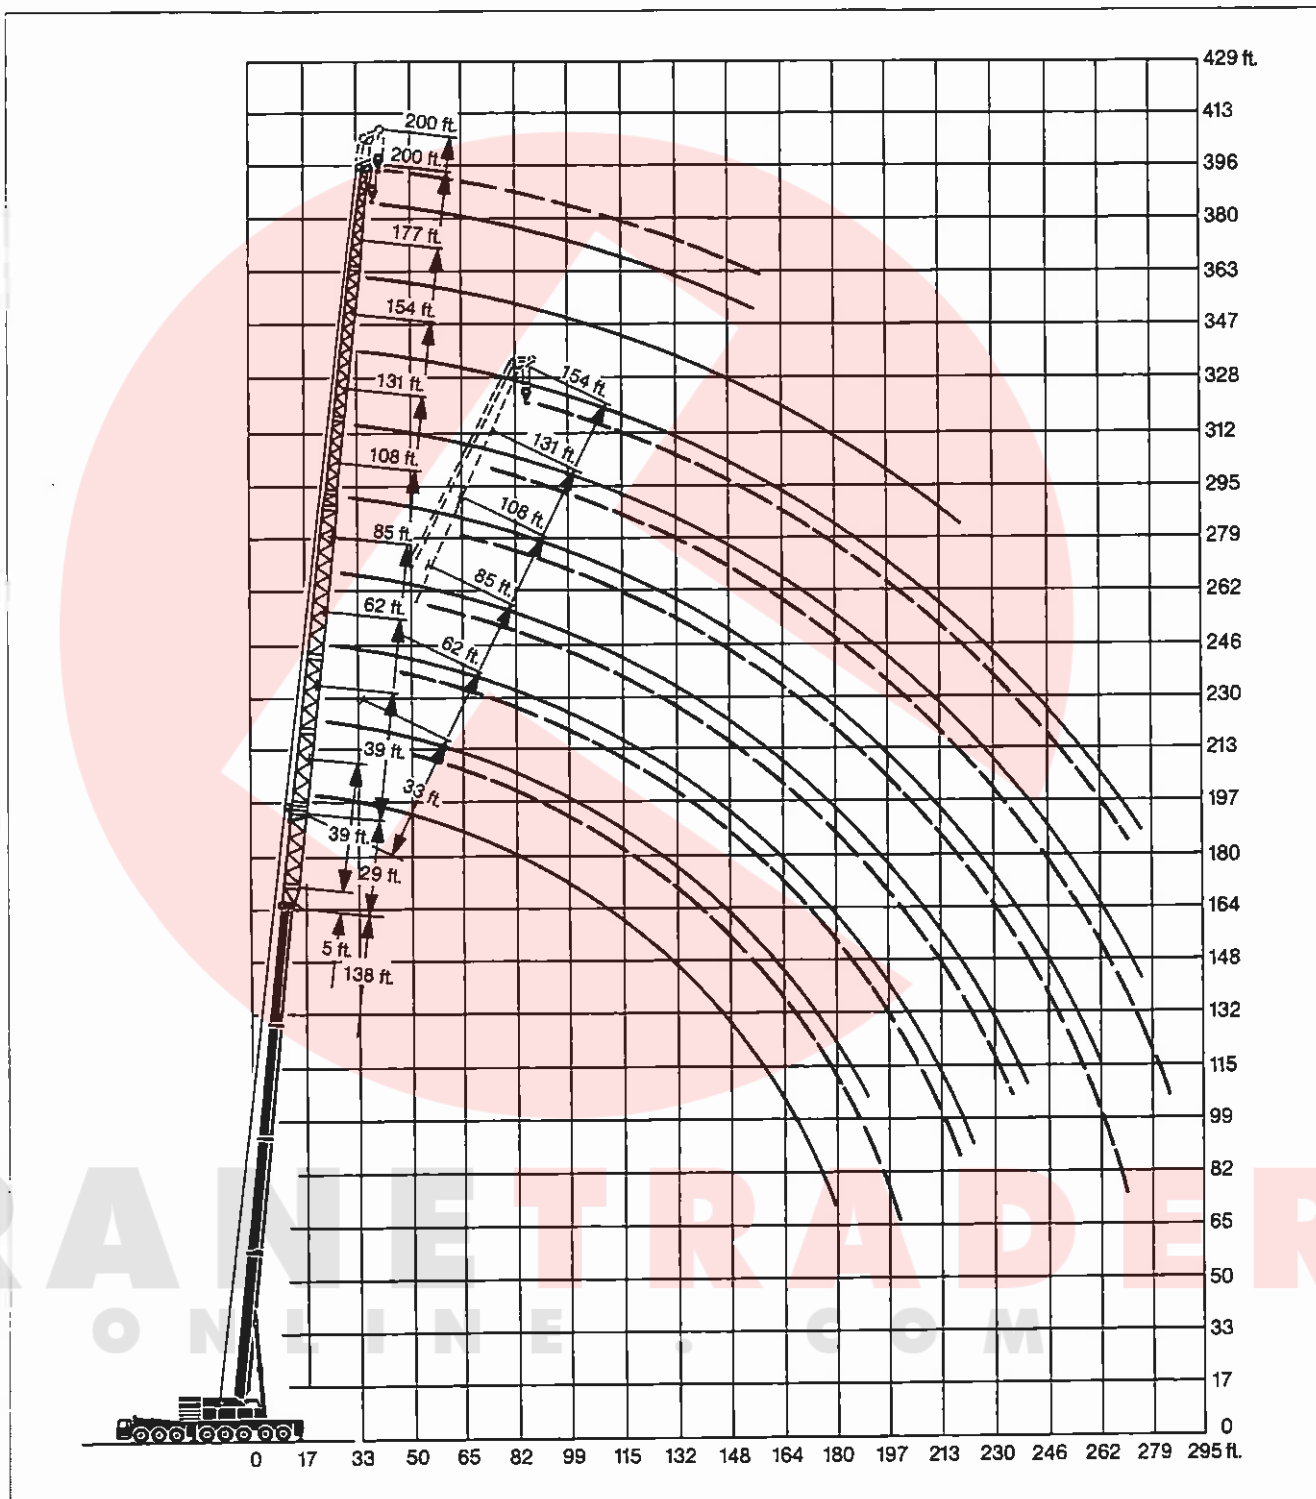



Dimensions. Encombrement.

LTM 1400

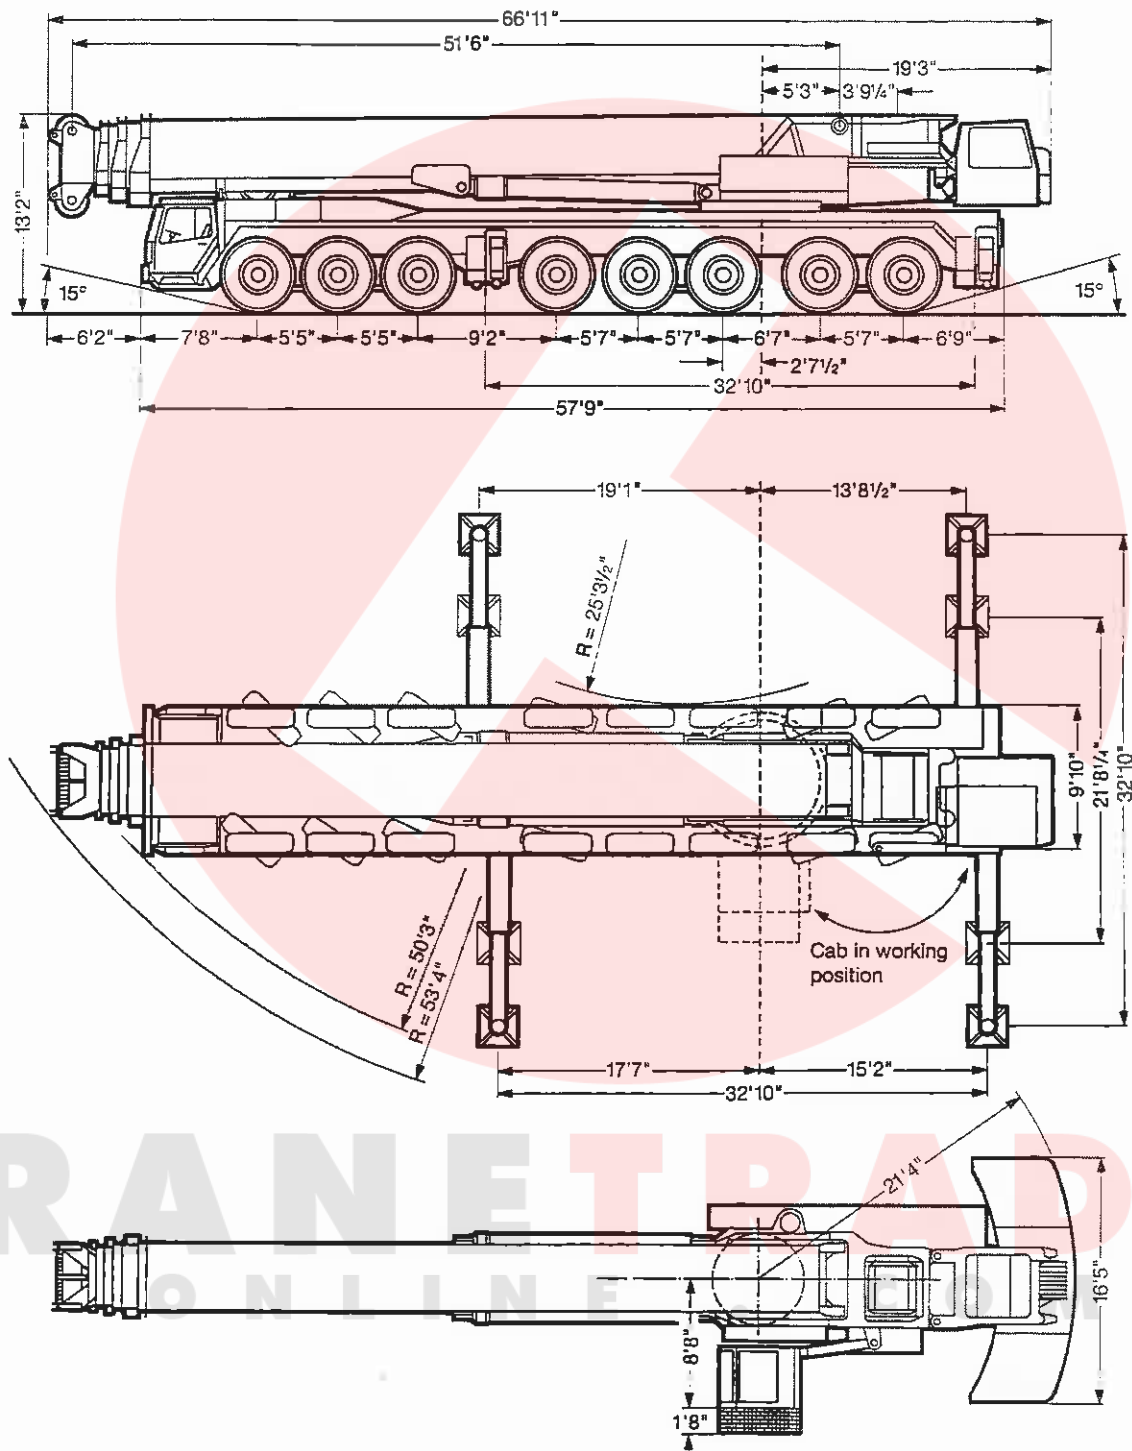



Weights. Poids.

LTM 1400



Axle Essieu	1	2	3	4	5	6	7	8	Total weight Poids total
lbs	26500	26500	26500	26500	26500	26500	26500	26500	212000



Load (kips) Forces de levage (kips)	No. of sheaves Poulies	No. of lines Brins	Weight lbs Poids lbs
507	11	22	5732
341.7	7	14	4409
178.6	3	7	3307
79.4	1	3	2205
26.5	-	1	1102

Working speeds. Vitesses.



	1	2	3	4	5	R	
	8	13	22.4	29.8	40.4	8.5	16 %
	3.7	6.2	9.9	14.3	19.3	4.1	31 %
	16.00 R 25						



Drive Mécanismes	infinitely variable en continu	Rope diameter / Rope length Diamètre du câble / Longueur du câble	Max. single line pull Effort au brin maxi.
	0 - 526 ft/min single line ft/mn au brin simple	3/8" / 1575'	26900 lbs
	0 - 526 ft/min single line ft/mn au brin simple	3/4" / 2460'	26900 lbs
	0 - 1,2 rpm		
	approx. 100 seconds to reach 83° boom angle env. 100 s jusqu'à 83°		
	approx. 130 seconds / 350 seconds for boom extension from 52 ft - 164 ft env. 130 s / 350 s pour passer de 52 ft - 164 ft		



Crane carrier.

LTM 1400

Frame:	Liebherr designed and manufactured, box type, torsion resistant, all-welded construction made of high-tensile structural steel.
Outriggers:	4 sliding beams with hydraulic extension cylinders and hydraulic support pad jacks. Front outriggers mounted between axles 3 and 4, rear outriggers at rear of truck chassis.
Engine:	Diesel, 8 cylinder, watercooled, make Liebherr, type D 9408 TI-E, output 420 kW DIN (570 HP) at 2100 rpm acc. to ECE-R 24.03 and ECE-R 49.02 (EURO II), max. torque 1718 lbs-ft at 1500 rpm. Fuel tank capacity: 162 gallons.
Transmission:	Allison type CLBT 755 automatic transmission with torque converter and hydrodynamic retarder brake. 5 forward speeds, 1 reverse. Splitter gearbox with differential and differential lock, off-road range.
Axles:	Heavy duty crane truck axles, all 8 axles sprung. Axles 1 to 4 and 7 and 8 steered. Axles 1, 2, 5 and 6 are planetary axles with differential locks.
Suspension:	All axles are hydropneumatically sprung with automatic levelling. Load equalization between axle pairs 1 + 2, 3 + 4, 5 + 6 and 7 + 8. Suspension hydraulically locked.
Tyres:	16 tyres, all axles with single tyres. Tyre size: 16.00 R 25.
Steering:	ZF semi-unitary hydraulic power steering, dual circuit system, with hydraulic servo mechanism and auxiliary pump circuit from final drive.
Brakes:	Service brake: servo assisted air brakes acting on all wheels, dual circuit system. Hand brake: spring-action, acting on all wheels of axles 5 to 8.
Driver's cab:	Large-area, all-steel cab with resilient mountings, safety glass windows and full range of instruments.
Electrical system:	24 Volts DC, 2 batteries, lighting to German road vehicle regulations.

Crane superstructure.

Frame:	Liebherr-made, torsion-resistant, welded construction made of high-tensile structural steel. Connection to truck chassis by triple roller slewing ring, designed for 360° continuous rotation.
Crane engine:	Diesel, 6 cylinder, watercooled, make Liebherr, type D 926 TI-E, output 240 kW DIN (326 HP) at 1800 rpm, max. torque 1090 lbs-ft at 1800 rpm.
Crane drive:	Diesel-hydraulic, with 5 axial piston swivelling pumps with servo control and automatic output regulation.
Crane control:	By self-centering control lever, movable in 4 directions (cross-control arrangement).
Main winch:	Axial piston swivelling motor, full hydraulic power up and down. Hoist drum with integrated planetary gear and spring loaded brake.
Luffing gear:	Twin double-acting hydraulic cylinders with integral safety locking valves.
Slewing gear:	Planetary gear with flange connected hydraulic motor and spring loaded brake.
Crane cab:	All-steel construction, safety glazing, controls and instruments. Crane cab is swing to rear when driving on road.
Safety devices:	Electronic load-moment limiter, hoist limit switch, safety valves to protect hydraulic system against pipe and hose fracture.
Telescopic boom:	1 boom pivot section and 3 telescopic sections. All sections separat hydraulically extendable. Boom length: 52 ft - 164 ft.
Electrical system:	24 Volts DC, 2 batteries.

Additional equipment.

Lattice jibs:	Luffing lattice jib 69 ft - 276 ft, lattice fly jib 39 ft - 200 ft.
Hoisting gear 2:	For two-hook operation or to luff the lattice fly jib.

Other items of equipment available on request.

CRANETRADE
ONLINE.COM



Châssis porteur.

LTM 1400

Châssis:	Fabrication Liebherr, construction en caisson indéformable, en acier grain fin à haute résistance.
Stabilisateurs:	Quatre poutres télescopiques, avec vérins d'appui hydrauliques et semelles. Les carters des poutres de stabilisation avant sont disposés entre les essieux 3 et 4, les carters AR à l'arrière du châssis.
Moteur:	Diesel, 8 cylindres, marque Liebherr, type D 9408 TI-E, refroidissement par eau, puissance 420 kW DIN (570 ch) à 2100 rpm selon ECE-R 24.03 et ECE-R 49.02 (EURO II), couple maxi. 1718 lbs-ft à 1500 rpm. Capacité du réservoir carburant: 162 gallons.
Boîte:	Boîte automatique, marque Allison, type CLBT 755, avec convertisseur de couple et ralentisseur hydraulique. 5 rapports AV et 1 AB. Boîte de transfert avec répartiteur différentiel et rapport tout terrain.
Essieux:	Essieux spéciaux lourds. Tous les 8 essieux disposent d'une suspension intégrale. Les essieux 1 à 4 et 7 et 8 sont directeurs. Les essieux 1, 2, 5 et 6 sont à trains planétaires avec blocage des différentiels.
Suspension:	Tous les essieux disposent d'une suspension hydropneumatique avec système d'équilibrage automatique. Dispositif de répartition des charges entre les essieux 1 + 2, 3 + 4, 5 + 6 et 7 + 8. Suspension blocable hydrauliquement.
Pneumatiques:	16 pneumatiques, tous les essieux munis de roues simples. Dimension des pneumatiques: 16.00 R 25.
Direction:	Direction hydraulique semi-bloc ZF, à deux circuits, assistée hydrauliquement, avec pompe auxiliaire entraînée par essieu.
Freins:	Assistés pneumatiquement, agissant sur toutes les roues, conformes au code. Frein à main: par cylindres à ressort agissant sur les essieux 5 à 8.
Cabine:	Cabine spacieuse entièrement réalisée en tôles d'acier, suspension assurée par silent-blocs, vitrage de sécurité, tableau de bord complet.
Installation électrique:	24 volts continus, 2 batteries, éclairage conforme au code.

Partie tournante.

Châssis:	De fabrication Liebherr, soudé, en acier spécial, résistant à la torsion. Couronne d'orientation à triple rangée de rouleaux, orientation sur 360°.
Moteur:	Diesel, 6 cylindres, marque Liebherr, type D 926 TI-E, refroidissement par eau, puissance 240 kW DIN (326 ch) à 1800 rpm ⁻¹ , couple maxi. 1090 lbs-ft à 1200 rpm.
Entraînement:	Diesel-hydraulique comprenant 5 pompes à débit variable à servo-commande et régulation de puissance.
Commande:	Deux leviers quatre directions à rappel automatique au point mort.
Mécan. de levage principal:	Moteur hydraulique à cylindrée variable, treuil de levage avec réducteur planétaire incorporé et frein d'arrêt commandé par ressort.
Mécan. de relevage:	Deux vérins différentiels, avec clapet anti-retour de sécurité.
Orientation:	Moteur hydraulique, réducteur planétaire, pignon d'orientation et frein d'arrêt commandé par ressort.
Cabine:	Entièrement réalisée en tôles d'acier avec vitrage de sécurité, organes de commande et appareils de contrôle. Pour les déplacements sur route, la cabine de la tourelle doit être orientée vers l'arrière.
Sécurités:	Limiteur du couple électronique, fin de course de levage, soupapes de sûreté, sur tubes et flexibles.
Flèche télescopique:	Flèche à télescopage hydraulique formée d'un élément de base et de 3 éléments télescopables. Télescopage individuel de toutes les éléments télescopiques. Longueur de flèche: 52 ft - 164 ft.
Installation électrique:	24 volts continus, 2 batteries.

Equipement optionnel.

Fléchettes treillis:	Fléchette treillis relevable 69 ft - 276 ft, fléchette treillis fixe 39 ft - 200 ft.
Mécan. de levage secondaire:	Pour le travail avec 2 crochets ou le relevage de la fléchette treillis.

Autres équipements supplémentaires sur demande.



CRANETRADER
O N L I N E . C O M

Subject to modification. / Sous réserve de modifications.

TP 88 CA b. 7.97

Please contact

Veuillez prendre contact avec

LIEBHERR-WERK EHINGEN GMBH

D-89582 Ehingen/Donau, Telefon (0 73 91) 5 02-0, Telefax (0 73 91) 5 02-3 99